



# Huawei P9 Plus Rear Case Replacement

This guide describes the removal and replacement of the rear case of a Huawei P9 Plus.

Written By: Dominik Schnabelrauch



## INTRODUCTION

Use this guide to remove and replace the rear case of a Huawei P9 Plus.

---



### TOOLS:

- [SIM Card Eject Tool](#) (1)
  - [Spudger](#) (1)
  - [iSclack](#) (1)
-

## Step 1 — Rear Case




- First switch off your phone.
- Remove the SD and SIM card tray.
- Remove the two Pentalobe P2 screws located at the bottom next to the USB C port.

## Step 2



- Use a spudger, to initially lift one side of the display through the headphone jack.
- Then take an iSlack or a suction handle to separate the display unit from the rear case.

## Step 3

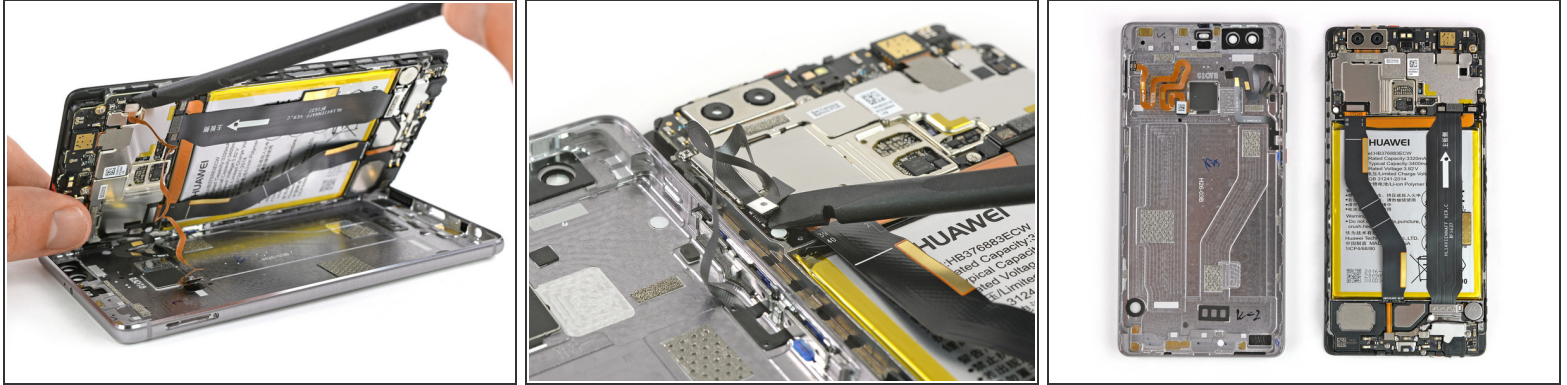

- After separating the rear case flip the other half open to get to the flex connectors.
- With a spudger unplug the flex connector of the fingerprint sensor and the one of the side buttons.
- Remove the rear case.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-07-21 03:40:12 PM.